



C.C. Steven

SmartTray™ System

Designed to maximize productivity by accelerating throughput, minimizing PCB handling damage and providing superior ESD protection. The 18" x 26" footprint handles multiple-sized boards.

The ESD-safe SmartTray facilitates efficient tracking of work-in-process and finished goods with the use of bar code technology.

Molded from Metrostat™, a material offering premium ESD protection, the SmartTray fits all Metro tray cart systems as well as all competitive bottom-loaded models, and most tray based cart systems in today's marketplace.

Put the SmartTray advantage to work for you!



SmartTray™ engages with wire cart design to provide optimum ergonomic access.

Features:

- Bar code labeling
- Color coding
- Detent system
- Metrostat™ material
- Universal design
- Cart color coding

Benefits:

- Trays & tray contents can be tracked throughout manufacturing/assembly process.
- Trays & tray contents can be scanned while in cart, as opposed to scanning each item individually.
- Trays & tray contents can be sorted & categorized according to product type, application, or dedicated to a specific production line.
- Trays can be suspended in cart for optimum ergonomic access.
- Offers permanent ESD protection for sensitive electronics parts.
- SmartTrays can be used with all bottom-load tray cart designs, Metro and non-Metro models, as well as conveyor systems.
- Carts can be sorted & categorized according to product type, application, or specific production line.





SmartTray Cart System

Model No. **CBNTC20M** — shown with accessories



SmartTray™ System

Specifications

- **Shelves, posts, slides, handles & stop bars:** ESD safe chrome-plated finish with Metrolac protective coating.
- **Casters:** 5" stem/swivel vibration suppression casters (5MFA series). Two brake, two swivel casters.

SmartTray Cart Solutions (cart with trays & tray inlays)

*Choose between Metro's premium two-layer tray inlay or the economy inlay (see ESD Tray Inlay section below for more information).

Model No.	Description	Tray Inlay Type*	Tray Capacity	Slide Spacing		Width/Length		Height		Approx. Pkd. Wt.	
				(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
CBNTC20MSOL1	Front-load cart with SmartTrays (20) & tray inlays (20)	Premium	20	1 ³ / ₄	44	28x22	711x559	49	1245	160	72.5
CBNTC30MSOL1	Front-load cart with SmartTrays (30) & tray inlays (30)	Premium	30	1 ³ / ₄	44	28x22	711x559	63	1600	217	98
CBNTCS20MSOL1	Side-load cart with SmartTrays (20) & tray inlays (20)	Premium	20	1 ³ / ₄	44	22x30	559x762	49	1245	160	72.5
CBNTC20MSOL2	Front-load cart with SmartTrays (20) & tray inlays (20)	Economy	20	1 ³ / ₄	44	28x22	711x559	49	1245	160	72.5
CBNTC30MSOL2	Front-load cart with SmartTrays (30) & tray inlays (30)	Economy	30	1 ³ / ₄	44	28x22	711x559	63	1600	217	98
CBNTCS20MSOL2	Side-load cart with SmartTrays (20) & tray inlays (20)	Economy	20	1 ³ / ₄	44	22x30	559x762	49	1245	160	72.5

Note: Refer to Tray Inlay & SmartTray section below for technical & electrical property information

Olympic SmartTray™

Model No.	Description	Color	Maximum Load Rating		Outside Dimensions		Inside Dimensions		Height		Approx. Pkd. Wt.	
			(lbs.)	(kg)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
CBNTC-MTRAY	ESD molded fiberglass tray	Black	150	68	25 ³ / ₄ x 17 ³ / ₄	654x451	23 ¹⁵ / ₁₆ x 15 ¹⁵ / ₁₆	608x405	1 ¹ / ₈	28.6	3	1.36

NOTE 1: Tray load rating shown above is based on evenly distributed load in conveyor applications.

NOTE 2: SmartTray safe temperature operating range is -20°F to 160°F.

NOTE 3: SmartTrays stack efficiently by themselves, as well as with competitive tray designs of the same dimension.

NOTE 4: SmartTrays are compatible with all bottom-loaded tray based cart systems, both Metro and non-Metro.

CBNTC-MTRAY Electrical Properties:

Property	Test Method	Value
RTT Resistance	ESD S4.1-1997	1.8x10 ⁵ -1.4x10 ⁷ Ohms
RTG Resistance	ESD S4.1-1997	1.4x10 ⁶ -2.8x10 ⁶ Ohms
Surface Resistivity	ANSI/EOS/ESD-S11.11-1993	1.0x10 ⁶ -9.9x10 ⁹ Ohms/Sq.

ESD Tray Inlays

Model No.	Description	Color	Width/Length		Thickness		Approx. Pkd. Wt.	
			(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
CBTC-INLAY01*	Premium rubber inlay, two-layer	Blue (topside)/Black (bottomside)	24.125x16.1	612x410	0.06	1.5	1.5	0.68
CBNTC-INLAY02**	Economy vinyl inlay, single-layer	Blue	24x16.125	610x410	0.125	3	1.5	0.68

*CBTC-INLAY01 offers maximum ESD protection, as well as superior resistance to heat, abrasion, and chemicals. The soft dissipative top layer makes it ideal for use in soldering and assembly areas. Easy to clean and maintain.

**CBNTC-INLAY02 provides soft-surface inlay for cushioned PCB transport. Inlay provides static dissipative ESD protection. Not recommended for use in soldering and assembly applications.

CBTC-INLAY01 Electrical Properties:

Property	Test Method	Value
RTT Resistance	ESD S4.1-1997	4.6x10 ⁶ -9.0x10 ⁶ Ohms
RTG Resistance	ESD S4.1-1997	2.3x10 ⁶ -4.7x10 ⁶ Ohms

CBNTC-INLAY02 Electrical Properties:

Property	Test Method	Value
RTT Resistance	ESD S4.1-1997	1.2x10 ⁷ -9.0x10 ⁷ Ohms
RTG Resistance	ESD S4.1-1997	1.4x10 ⁷ -2.0x10 ⁷ Ohms

SmartTray Carts

Model No.	Description	Tray Capacity No.	Slide Spacing		Width/Length		Height		Approx. Pkd. Wt.	
			(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
CBNTC20M	Front-Load Cart (short)	20	1 ³ / ₄	44	28x22	711x559	49	1245	80	36
CBNTC30M	Front-Load Cart (tall)	30	1 ³ / ₄	44	28x22	711x559	63	1600	97	44
CBNTCS20M	Side-Load Cart	20	1 ³ / ₄	44	22x30	559x762	49	1245	80	36

NOTE: CBNTC20M & CBNTCS20M are each load rated at 25 lbs. per level/500lbs. per cart. CBNTC30M is load rated at 20 lbs. per level/600 lbs. per cart.

NOTE: Each cart comes complete with 4 vibration suppression casters (2 brake/2swivel), a grounding cable, 2 push handles (except CBNTC30M), & 2 stop bars.

SmartTray™ Accessories




ESD Cart Covers

Conductive on the outside and static dissipative on the inside. Cover material is durable and comes standard with brass zippered front flap and side paperwork pouch.

Model No. CBNTC-CC20
fits SmartTray Cart # CBNTC20M

Model No. CBNTC-CC30
fits SmartTray Cart # CBNTC30M

Model No. CBNTC-CCS20
fits SmartTray Cart # CBNTCS20M

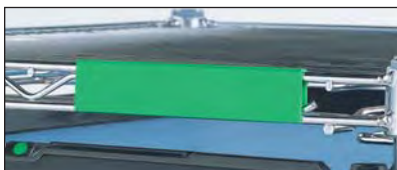

Color Shelf Markers

Designed to color code cart.

Tan
Model No. CSM6-T



Red
Model No. CSM6-R



White
Model No. CSM6-W



Yellow
Model No. CSM6-Y



Blue
Model No. CSM6-B



Green
Model No. CSM6-G



Color Markers measure 6"L x 1.25"H. Order in units of one.



ESD Label Holder

Identify cart assignment or function with Metro's ESD-safe label holder (label not included).

Model No. 9990PESD
(3"L x 1.25"H)

Model No. 9990P6ESD
(37"L x 1.25"H)



ESD Paperwork Basket

Store work order information, inspection record and other accompanying documentation in this convenient, durable and ESD-safe basket. Easy-on, easy-off design. Not recommended for use with ESD Cart Covers. Measures 13.375"L x 5"W x 7"H.

Model No. H209C

www.ccstevens.com



C.C. Steven & Associates, Inc.

4022 Camino Ranchero Unit B

Camarillo, CA 93012

Tel. 805-658-0207

Fax. 805-658-2789